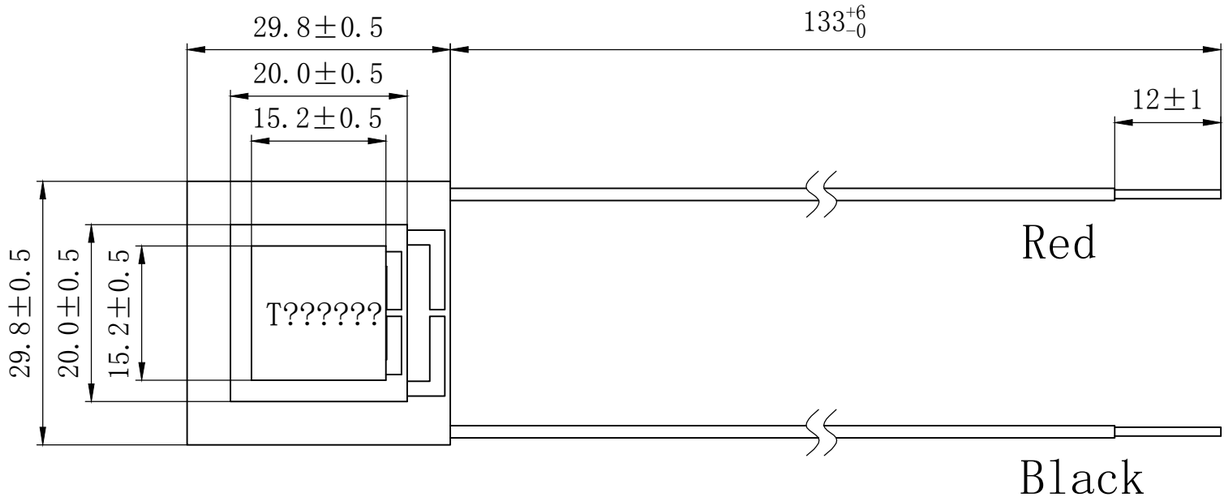

FERROTEC CONFIDENTIAL

1) The resistance of the module shall be within 1.269to 1.549 ohms at an ambient temperature of 25 degrees Celsius.
2) Material of lead wires: #20 AWG Tinned single strand.
3) Lot Number shall be stamped on the cold side with black color.
4) The end of lead wire is pre-soldered.

ROHS COMPLIANCE

Item	Value	Test Conditions
Imax	4.5A	Qc=0, DT=DTmax, Th=50℃
Vmax	8.6V	Qc=0, I=Imax, Th=50℃
DTmax	111℃	Qc=0, I=Imax, Th=50℃
Qcmax	9.7W	I=Imax, DT=0, Th=50℃
Thmax	200℃	Momentary

Ferrotec Corporation
(Zhijiang Factory)
668# Binkang Road, Hangzhou Hi-tech Garden,Zhejiang Province,P.R.China

General Dimension Tolerance

Size Range \ Process	Cutting Common	Cutting Special	Forging Common
less than 6	±0.1	±0.15	±0.5
6 up to 30	±0.2		
30 up to 120	±0.3	±0.2	±0.7
120 up to 315	±0.5	±0.25	±1.0
315 up to 1000	±0.8	±0.4	±1.5
1000 up to 2000	±1.2	±0.6	±2.0

PLs	Date Modifying	Summary Of Modification	By

Designed	Jiang	2014-6-5	Finished Mark
Checked	yongqing Wu	2014-6-5	Material
FTH Approved			Finish
FT Approved			Raw Material Size
FTA Approved			Raw Material Weight

Title	2030/119/045B		Proj. 3 Angle
Drawing Number	T0906-2900		1/1
P/N	8B323	Scale: Do Not Scale	Rev. Z