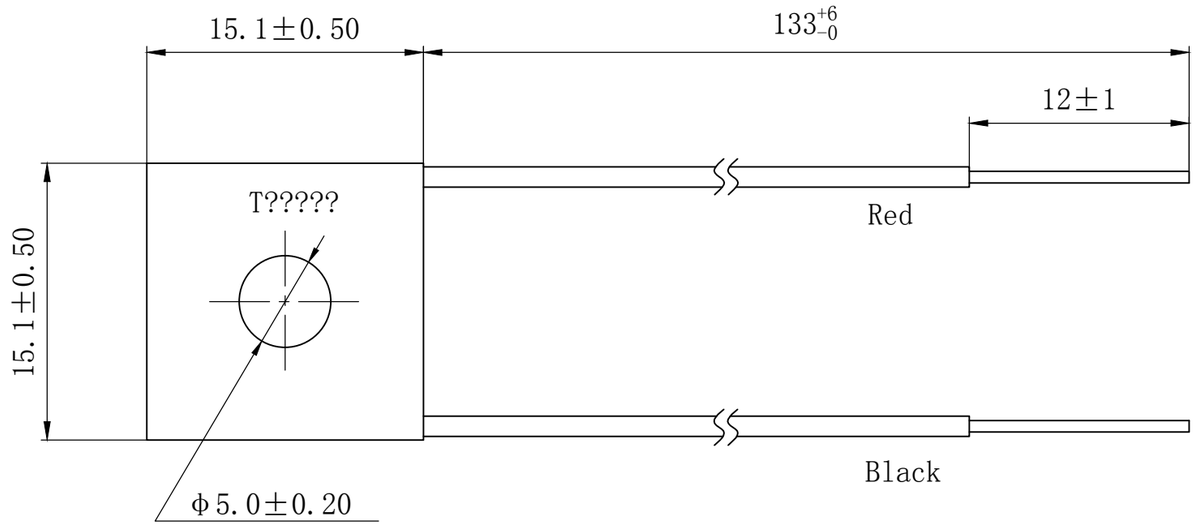

FERROTEC CONFIDENTIAL

1) The resistance of the module shall be within 0.710-0.863 ohms at an ambient temperature of 25 degrees Celsius.
2) Material of lead wires: #24 AWG Type-E Teflon MIL-W-16878E/4.
3) The end of the lead wires shall be pre-tinned.
4) Lot Number shall be stamped on the cold side with black color.

ROHS COMPLIANCE

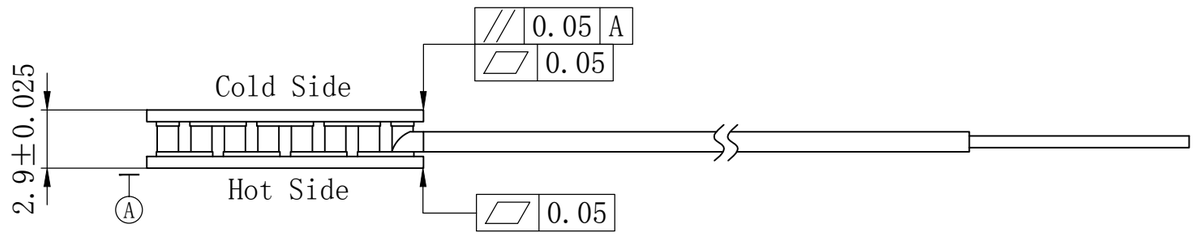

Item	Value	Test Conditions
Imax	3.0A	Qc=0, DT=DTmax, Th=50℃
Vmax	3.27V	Qc=0, I=Imax, Th=50℃
DTmax	83℃	Qc=0, I=Imax, Th=50℃
Qcmax	5.13W	I=Imax, DT=0, Th=50℃
Thmax	200℃	Momentary

Ferrotec Corporation
(Zhijiang Factory)
668# Binkang Road, Hangzhou Hi-tech Garden,Zhejiang Province,P.R.China

General Dimension Tolerance

Size Range \ Process	Cutting Common	Cutting Special	Forging Common
less than 6	±0.1	±0.15	±0.5
6 up to 30	±0.2		
30 up to 120	±0.3	±0.2	±0.7
120 up to 315	±0.5	±0.25	±1.0
315 up to 1000	±0.8	±0.4	±1.5
1000 up to 2000	±1.2	±0.6	±2.0

PLs	Date Modifying	Summary Of Modification	By

Designed	Jiang	2014-6-5	Finished Mark
Checked	yongqing Wu	2014-6-5	Material
FTH Approved			Finish
FT Approved			Raw Material Size
FTA Approved			Raw Material Weight

Title: 20083/023/030B			Proj. 3 Angle
Drawing Number: T1406-3000			1/1
P/N: 8B324	Scale: Do Not Scale		Rev. Z