


FERROTEC CONFIDENTIAL

- 1) The resistance of the module shall be within 0.962 to 1.174 ohms at an ambient temperature of 25 degrees Celsius.
- 2) Material of lead wires: #22 AWG Tinned single strand.
- 3) Lot Number and Part Number shall be stamped on the cold side with black color.

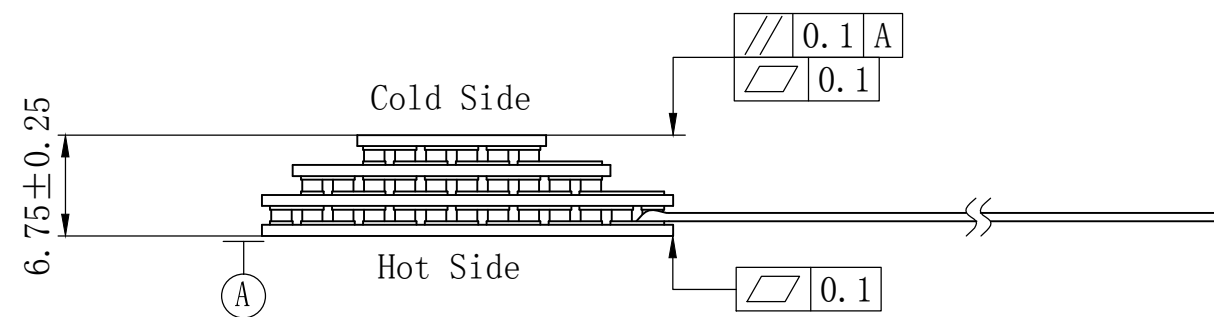

ROHS COMPLIANCE

| Item | Value | Test Conditions |
|-------------------|-------|---|
| I _{max} | 5.5A | Q _c =0, DT=DT _{max} , Th=50°C |
| V _{max} | 9..6V | Q _c =0, I=I _{max} , Th=50°C |
| DT _{max} | 111°C | Q _c =0, I=I _{max} , Th=50°C |
| Q _{cmax} | 8.7W | I=I _{max} , DT=0, Th=50°C |
| Th _{max} | 200°C | Momentary |

Ferrotec Corporation
 (Zhijiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R.China

| General Dimension Tolerance | | | | PLs | Date Modifying | Summary Of Modification | By | Designed | 2014-6-5 | Finished Mark | Title | Proj. |
|-----------------------------|---------|---------|---------|-----|----------------|-------------------------|----|----------|----------|---------------------|---------------|-------|
| Process | Cutting | | Forging | ▲ | | | | Jiang | 2014-6-5 | Material | 2030/106/055A | 3 |
| | Common | Special | Common | | | | | Checked | | | | |
| Size Range | | | | | | | | | | | | |
| less than 6 | ±0.1 | ±0.15 | ±0.5 | ▲ | | | | Approved | | Raw Material Size | T0906-0700 | 1/1 |
| 6 up to 30 | ±0.2 | | | ▲ | | | | Approved | | | | |
| 30 up to 120 | ±0.3 | ±0.2 | ±0.7 | ▲ | | | | Approved | | Raw Material Weight | 85180 | Z |
| 120 up to 315 | ±0.5 | ±0.25 | ±1.0 | ▲ | | | | Approved | | | | |
| 315 up to 1000 | ±0.8 | ±0.4 | ±1.5 | ▲ | | | | Approved | | | | |
| 1000 up to 2000 | ±1.2 | ±0.6 | ±2.0 | ▲ | | | | Approved | | | | |