



FERROTEC CONFIDENTIAL

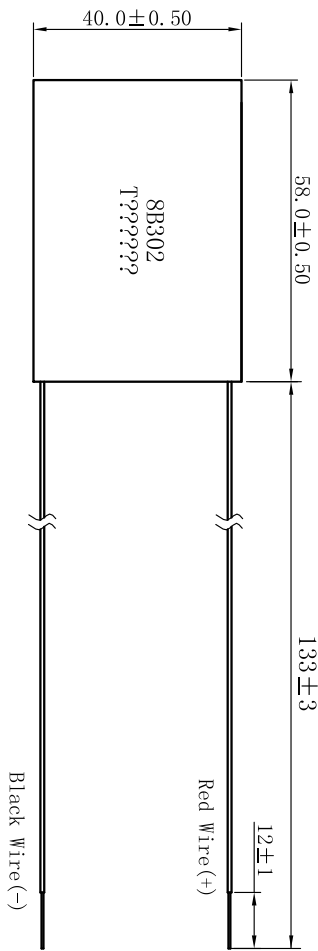

- 1) The resistance of the module shall be within 1.126 to 1.375 ohms at an ambient temperature of 25 degrees Celsius.
- 2) Material of lead wires: #18 AWG Type-E Teflon MIL-W-16878E/4.
- 3) The end of the lead wires shall be pre-tinned.
- 4) Lot Number and Part Number shall be stamped on the cold side with black color.

ROHS COMPLIANCE

Item	Value	Test Conditions
I _{max}	16.0A	q _c =0, D _T =D _{Tmax} , T _h =50°C
V _{max}	28.3V	q _c =0, I=I _{max} , T _h =50°C
D _{Tmax}	83 °C	q _c =0, I=I _{max} , T _h =50°C
Q _{cmax}	237W	I=I _{max} , D _T =0, T _h =50°C
T _{hmax}	200°C	Momentary

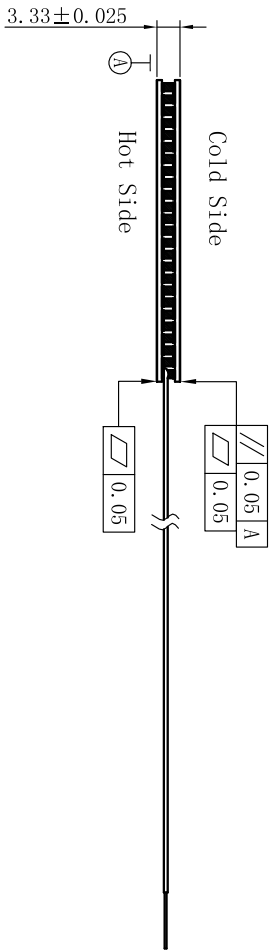

Ferrotec Corporation (Zhijiang Factory) 668# Binkang Road, Hangzhou Hi-tech Garden, Zhejiang Province, P.R.China		General Dimension Tolerance		Pls	Date Modifying	Summary of Modification		By	Designed	Finished Mark		Title		Proj.
		Process	Cutting	Forging	1	2016.11.17	Module name	Huang	Huang	Checked	Material	Drawing Number		3
Size range	Common	Special	Common						Yongqing Wu	16.11.17	FMSR	72008/199/160B		Angle
Lessthan 6	±0.1	±0.15	±0.5						Approved	Raw Material Size	T11406-0800		1	
6 up to 30	±0.2	±0.2	±0.7						Approved	Raw Material Weight	8B302		1	
30 up to 120	±0.3	±0.2	±1.0						Approved		P/N		Scale	
120 up to 315	±0.5	±0.25	±1.0						Approved		8B302		Do not Scale	
315 up to 1000	±0.8	±0.4	±1.5						Approved				Rev.	
1000 up to 2000	±1.2	±0.6	±2.0										A	