
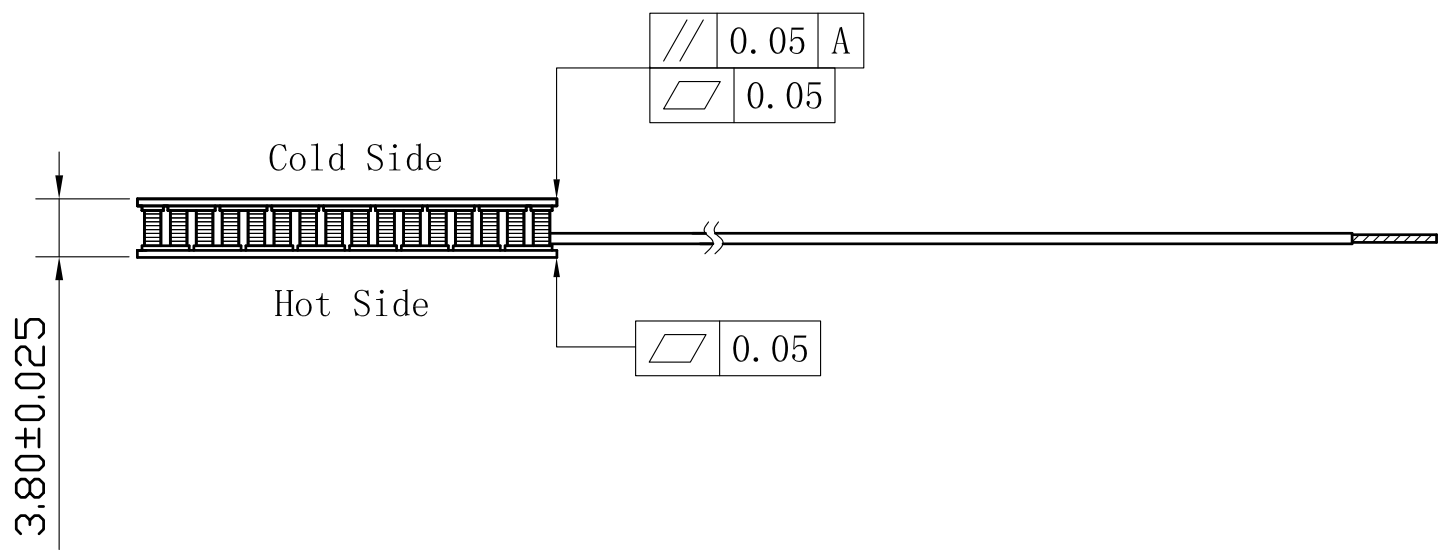


FERROTEC CONFIDENTIAL

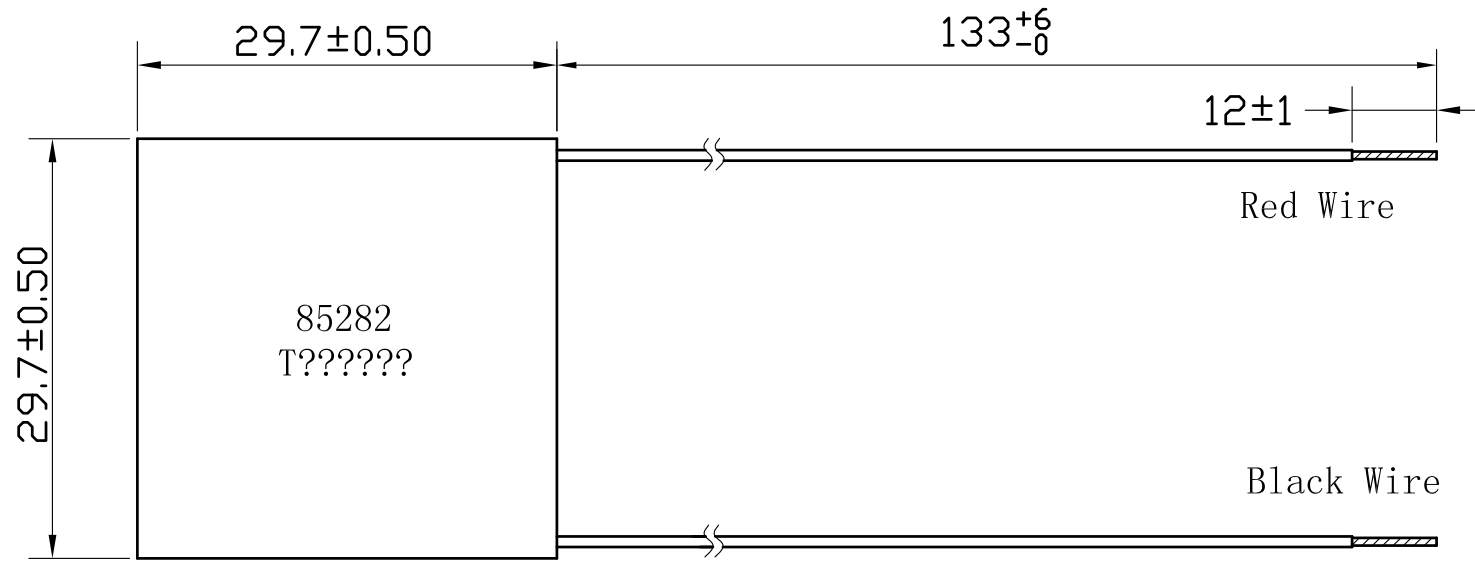

- 1) The resistance of the module shall be within 2.882 to 3.518 ohms at an ambient temperature of 25 degrees Celsius,.
- 2) Material of lead wires: #24 AWG Type-E Teflon MIL-W-16878E/4.
- 3) The end of the lead wires shall be pre-tinned.
- 4) The upper substrate shall be cold side if connecting the red wire to the positive pole of the power.

ROHS COMPLIANCE

Item	Value	Test Conditions
I _{max}	4.0A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	18.1V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	83°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	38W	I=I _{max} , DT=0, Th=50°C
Th _{max}	200°C	Momentary

Ferrotec Corporation
 (Zhijiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R.China

General Dimension Tolerance				Pls	Date Modifying	Summary of Modification	By	Designed	Finished Mark	Title	Proj.				
Process	Cutting		Forging									3	Angle		
	Size range	common	special	Common	1	1									
Less than 6	±0.1	±0.15	±0.5	▲						Approved	Material	72013/127/040B	3		
6 up to 30	±0.2	±0.2	±0.7		1	1									
30 up to 120	±0.3	±0.2	±0.7									1	1		
120 up to 315	±0.5	±0.25	±1.0		1	1									
315 up to 1000	±0.8	±0.4	±1.5									1	1		
1000 up to 2000	±1.2	±0.6	±2.0	1	1										
										Drawing Number	T0912-1500E	1	1		
										P/N	85282	Scale:	Do not Scale	Rev.	Z